


PART No.	CODE No.	NUMBER OF CONTACTS	A	B	C	D	E	F
DF9BA-31P-1V(32)	CL540-0209-4-32	31	21.1	19.3	17.6	14	15	19.4
DF9BA-41P-1V(32)	CL540-0220-7-32	41	26.1	24.3	22.6	19	20	24.4

NOTES 1 : LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
 2 CAV NO. IS INDICATED IN APPROX POSITION SHOWN.
 3 31 TO 41 CONTACT CONNECTORS HAVE TWO LOCKS AS PER DRAWING.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
3	BRASS	SURFACE:TIN PLATED(REFLOW FINISH)1μm min UNDER PLATING:COPPER 0.3μm min	8	PS	CLEAR(REINFORCEMENT COLLAR)
2	PHOSPHOR BRONZE	TIN PLATED(HOT DIP) 1μm min	7	PS	BLACK(PLASTIC REEL)
1	POLYAMIDE	BEIGE, UL94V-0	6	POLYIMIDE	BROWN(HEAT-RESISTANCE TAPE)
			5	POLYESTER	CLEAR(COVER TAPE)
			4	PS	CLEAR(EMBOSSD CARRIER TAPE)

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	△				

APPROVED : MO. ISHIDA	14.09.08	DRAWING NO.	EDC3-311259-02
CHECKED : TS. MIYAZAKI	14.09.08	PART NO.	DF9BA- *P-1V(32)
DESIGNED : YN. SAKAMOTO	14.09.08	CODE NO.	CL540-
DRAWN : YN. SAKAMOTO	14.09.08		

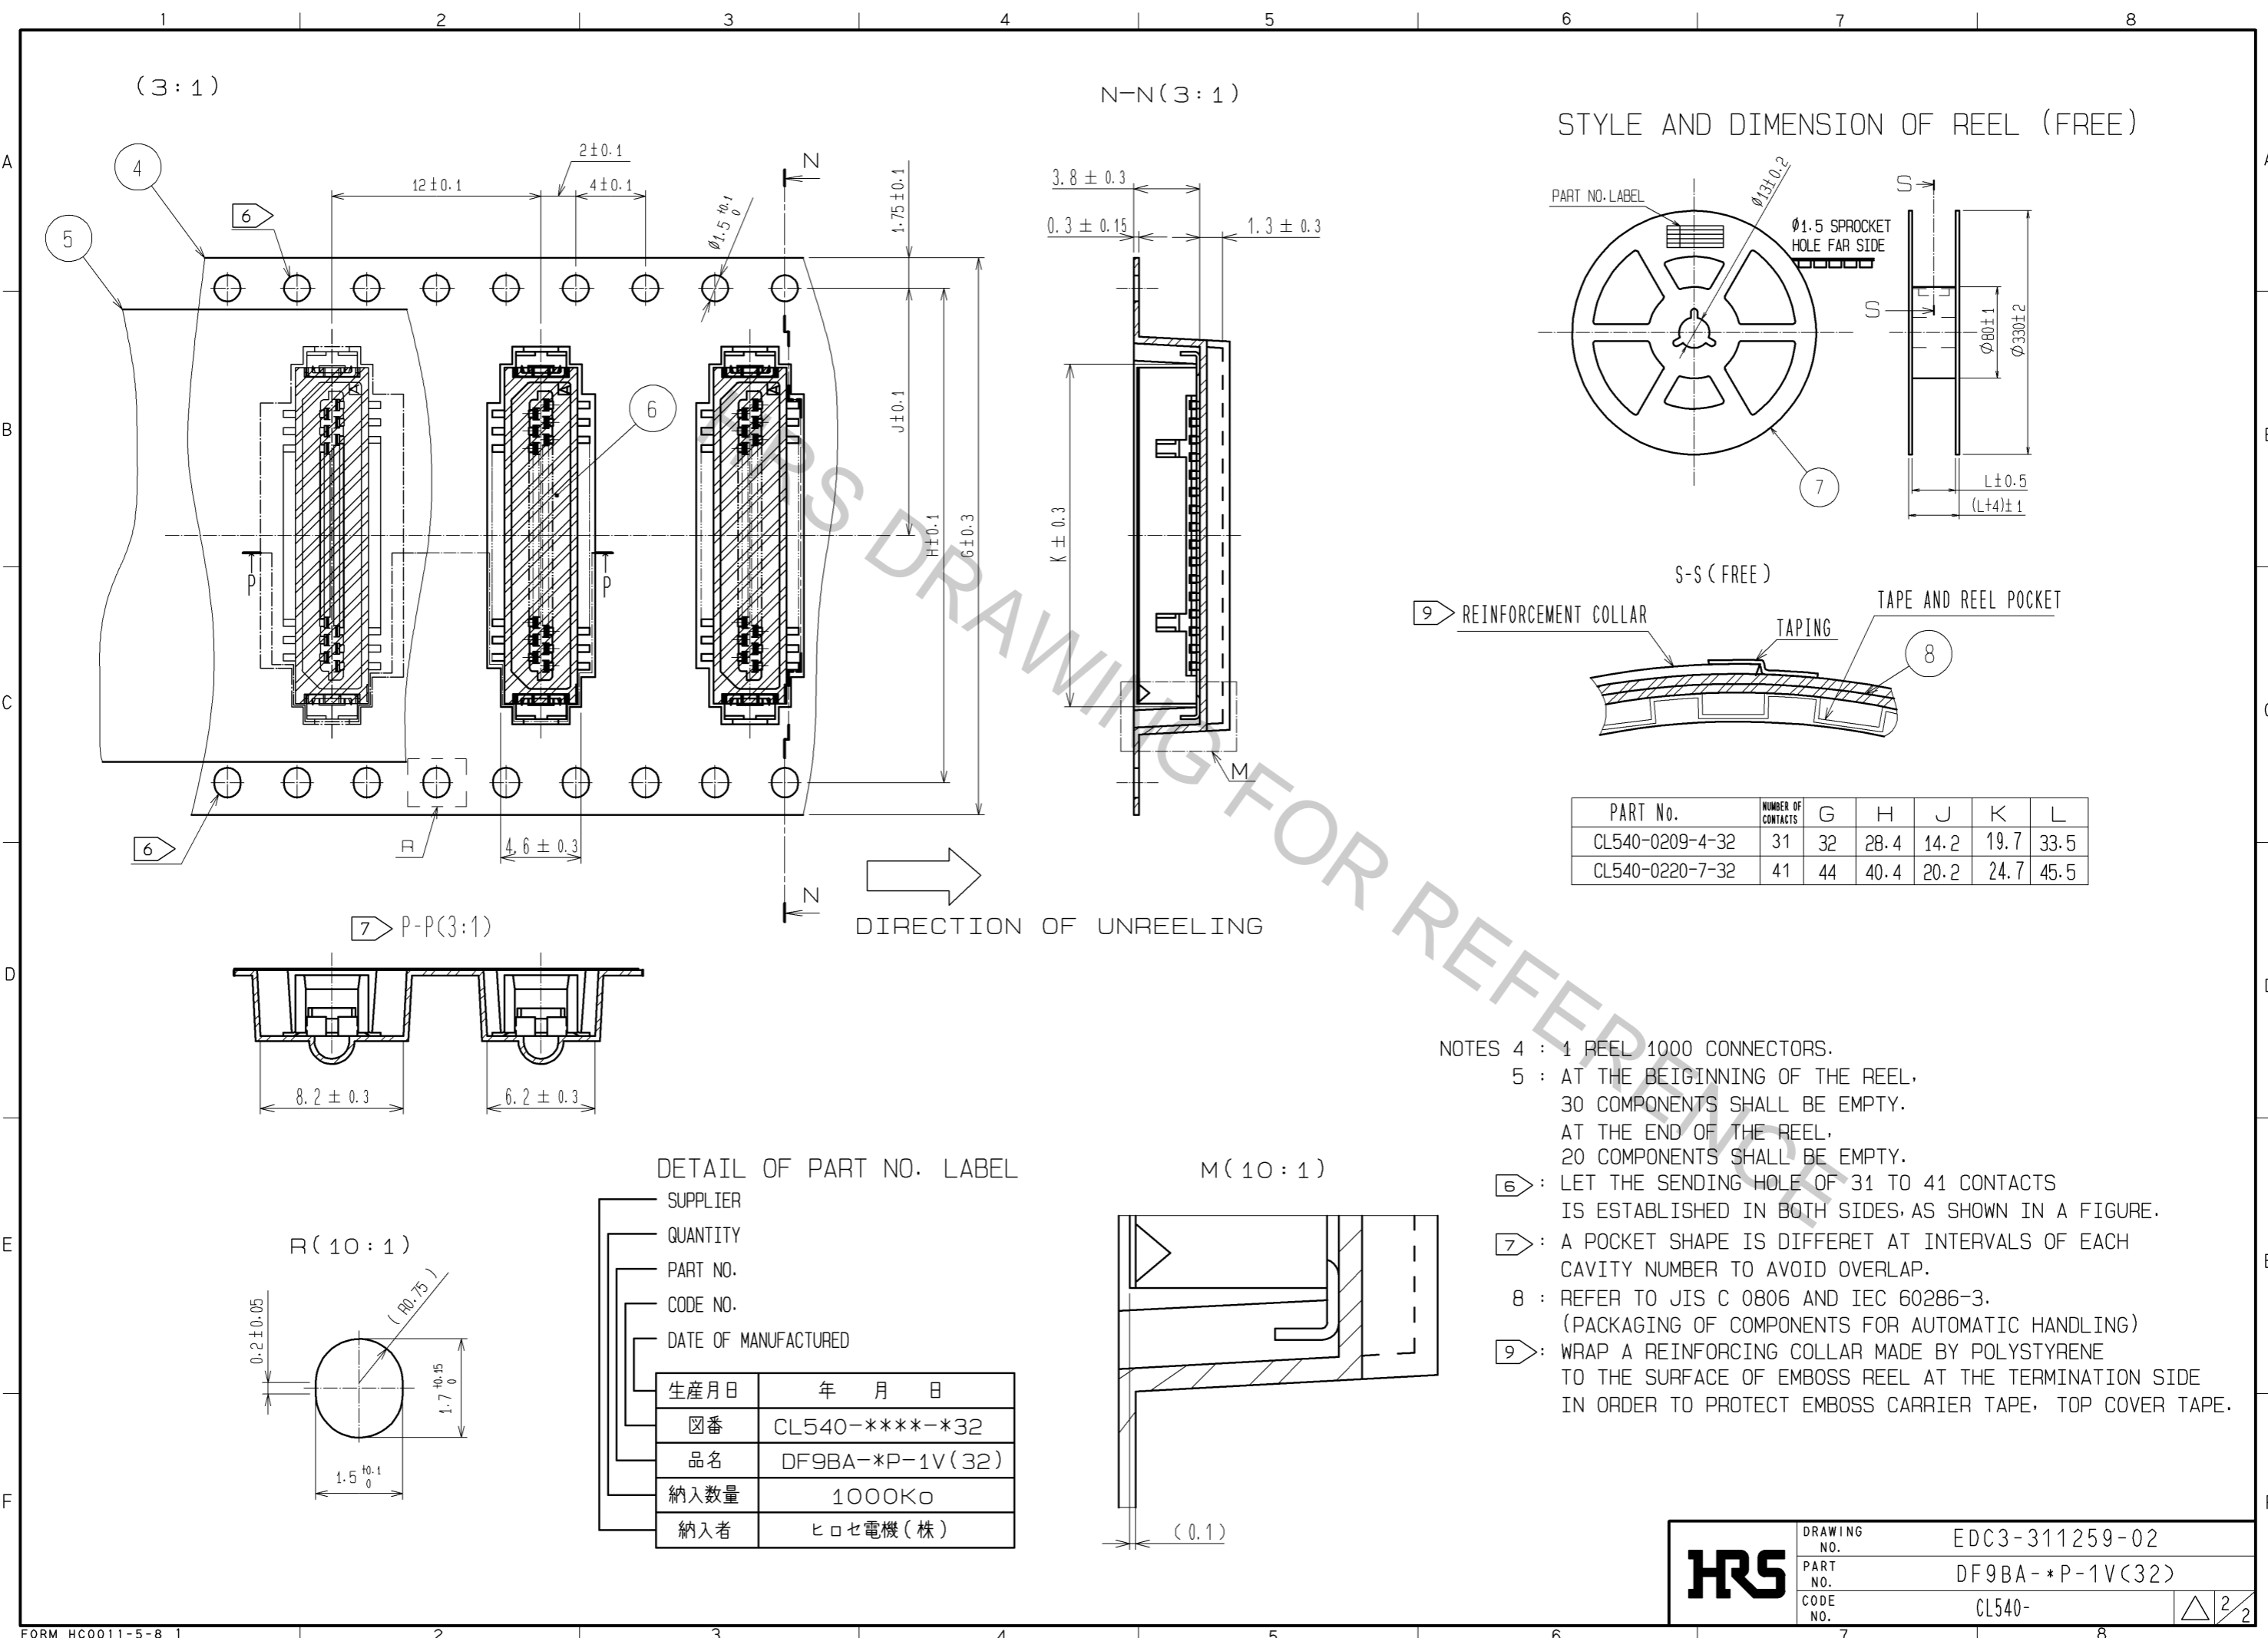

DETAIL OF PART NO. LABEL

SUPPLIER	
QUANTITY	
PART NO.	
CODE NO.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL540-****-32
品名	DF9BA-*P-1V(32)
納入数量	1000K \square
納入者	ヒロセ電機(株)

HRS	DRAWING NO.	EDC3-311259-02
	PART NO.	DF9BA-*P-1V(32)
	CODE NO.	CL540-