
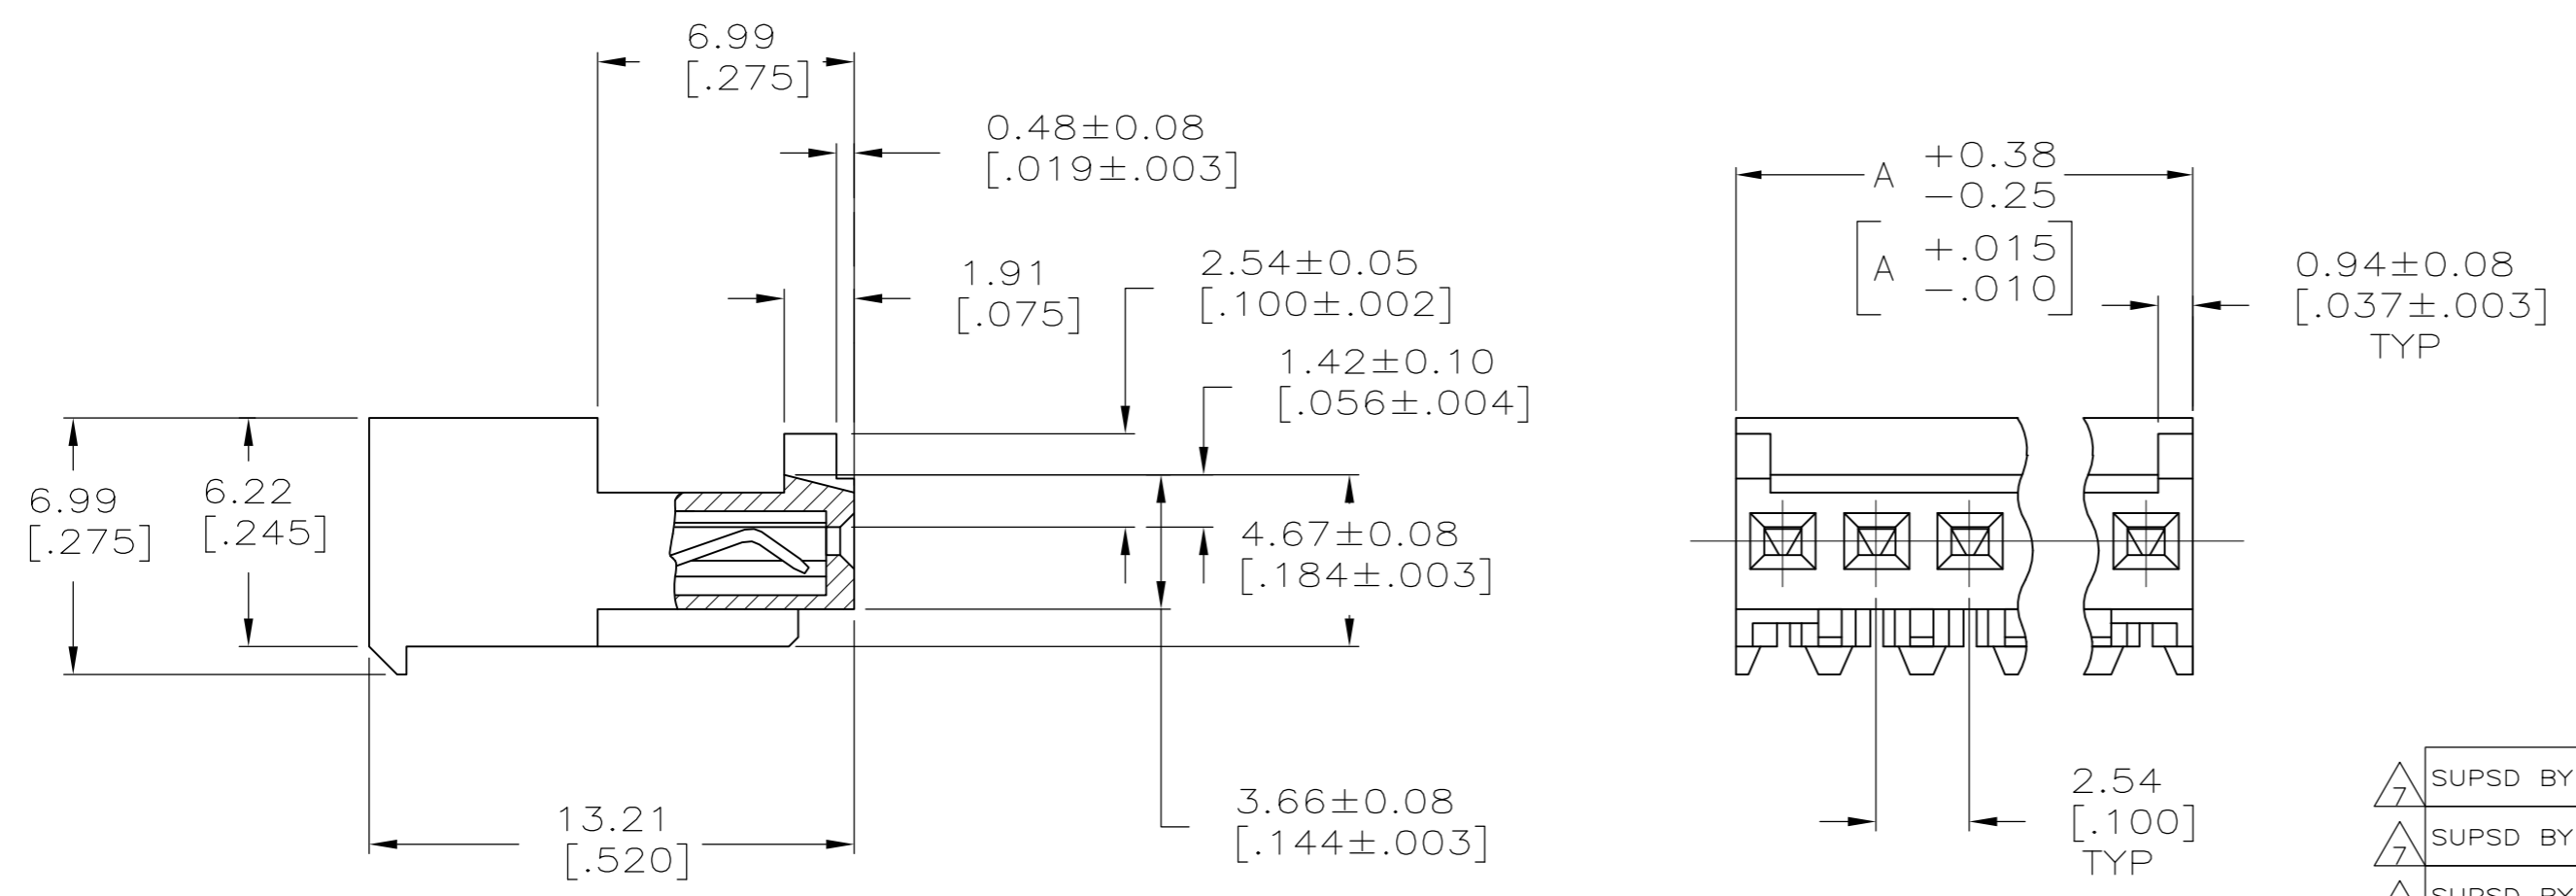


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00	G2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

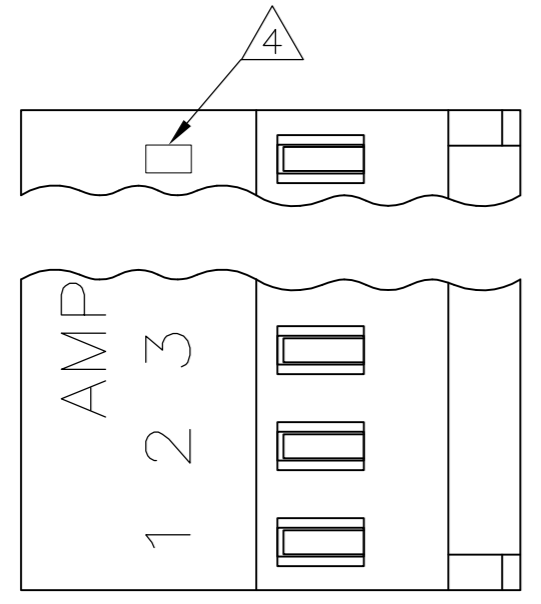

LEAD FREE	38.10	[1.500]	15	4-644312-5
	35.56	[1.400]	14	4-644312-4
	33.02	[1.300]	13	4-644312-3
	30.48	[1.200]	12	4-644312-2
	27.94	[1.100]	11	4-644312-1
	25.40	[1.000]	10	4-644312-0
	22.86	[.900]	9	3-644312-9
	20.32	[.800]	8	3-644312-8
	17.78	[.700]	7	3-644312-7
	15.24	[.600]	6	3-644312-6
	12.70	[.500]	5	3-644312-5
	10.16	[.400]	4	3-644312-4
	7.62	[.300]	3	3-644312-3
	5.08	[.200]	2	3-644312-2

CONTAINS LEAD	38.10	[1.500]	15	<del>1-644312-5</del>
	35.56	[1.400]	14	<del>1-644312-4</del>
	33.02	[1.300]	13	<del>1-644312-3</del>
	30.48	[1.200]	12	<del>1-644312-2</del>
	27.94	[1.100]	11	<del>1-644312-1</del>
	25.40	[1.000]	10	<del>1-644312-0</del>
	22.86	[.900]	9	<del>644312-9</del>
	20.32	[.800]	8	<del>644312-8</del>
	17.78	[.700]	7	<del>644312-7</del>
	15.24	[.600]	6	<del>644312-6</del>
	12.70	[.500]	5	<del>644312-5</del>
	10.16	[.400]	4	644312-4
	7.62	[.300]	3	644312-3
	5.08	[.200]	2	644312-2
	DIM A		NO. OF POSN	ASSEMBLY

① MATERIAL: CONNECTOR-NYLON UL94V-0 (BLACK).  
 CONTACTS-0.30 [.012] THICK COPPER ALLOY  
 BRIGHT TIN-LEAD 0.00203 [.000080] MIN THICK FOR CONTACTS  
 644312-2 THRU 1-644312-5  
 MATTE WHISKER MITIGATED TIN PLATE 0.00203 [.000080] MIN THICK  
 OVER 0.00076 [.000030] MIN THICK NICKEL FOR CONTACTS  
 3-644312-2 THRU 4-644312-5

- 2. CONTACTS ACCEPT 24 AWG WIRE WITH 1.52 [.060] MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 0.64±0.03 [.025±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- ④ IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.

- 6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP AND WITH POLARIZING TAB.
- ⑦ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 0.13 [.005] 3 PLC ± 4 PLC ±	DWN K. WHITAKER 24-FEB-2004	CHK D. BOSSI 24-FEB-2004	APVD D. BOSSI 24-FEB-2004	NAME MTA 100 CONNECTOR ASSEMBLY, 24 AWG, UL94V-0, SPECIAL
MATERIAL ①	FINISH ①	PRODUCT SPEC 108-1050		APPLICATION SPEC 114-1019	SIZE A2
CUSTOMER DRAWING			WEIGHT	CAGE CODE 00779	DRAWING NO C=644312
SCALE 5:1				SHEET 1 OF 1	REV G2