

SPECIFICATION CONTROL DRAWING


55/7313

TITLE THREE CONDUCTOR CABLE, SHIELDED, JACKETED, OUTER SPACE, 600 VOLT

Date 5-23-96

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55/.

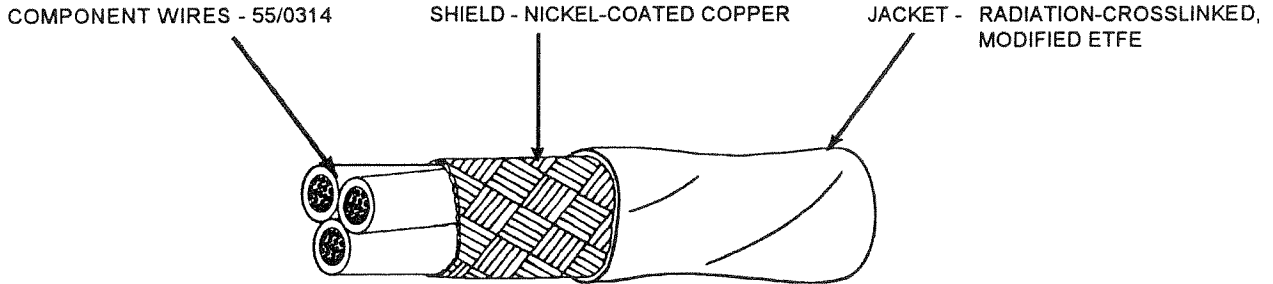

CABLE CONSTRUCTION DETAILS							
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lbs/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55/7313-28-*	28	38	.0040	.0050	.076	.081	6.45
55/7313-26-*	26	38	.0040	.0050	.086	.091	8.40
55/7313-24-*	24	38	.0040	.0050	.097	.102	10.80
55/7313-22-*	22	38	.0040	.0050	.111	.117	14.55

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms) at sea level
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 JACKET COLOR: White preferred
 JACKET ELONGATION: 75% (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

SHIELD COVERAGE: 90% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1500 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.
 Example: AWG 24, white, white with blue stripe and white with orange stripe component wires; white jacket: 55/7313-24-9/96/93-9

NOTE: Nominal values are for information only.
 Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.