

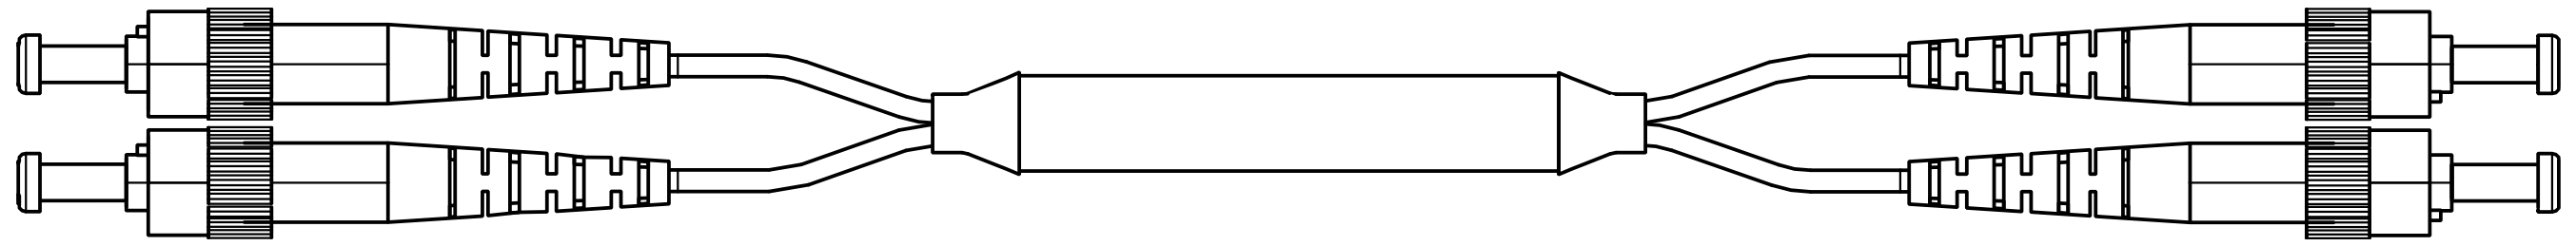



Alle Rechte vorbehalten. All rights reserved

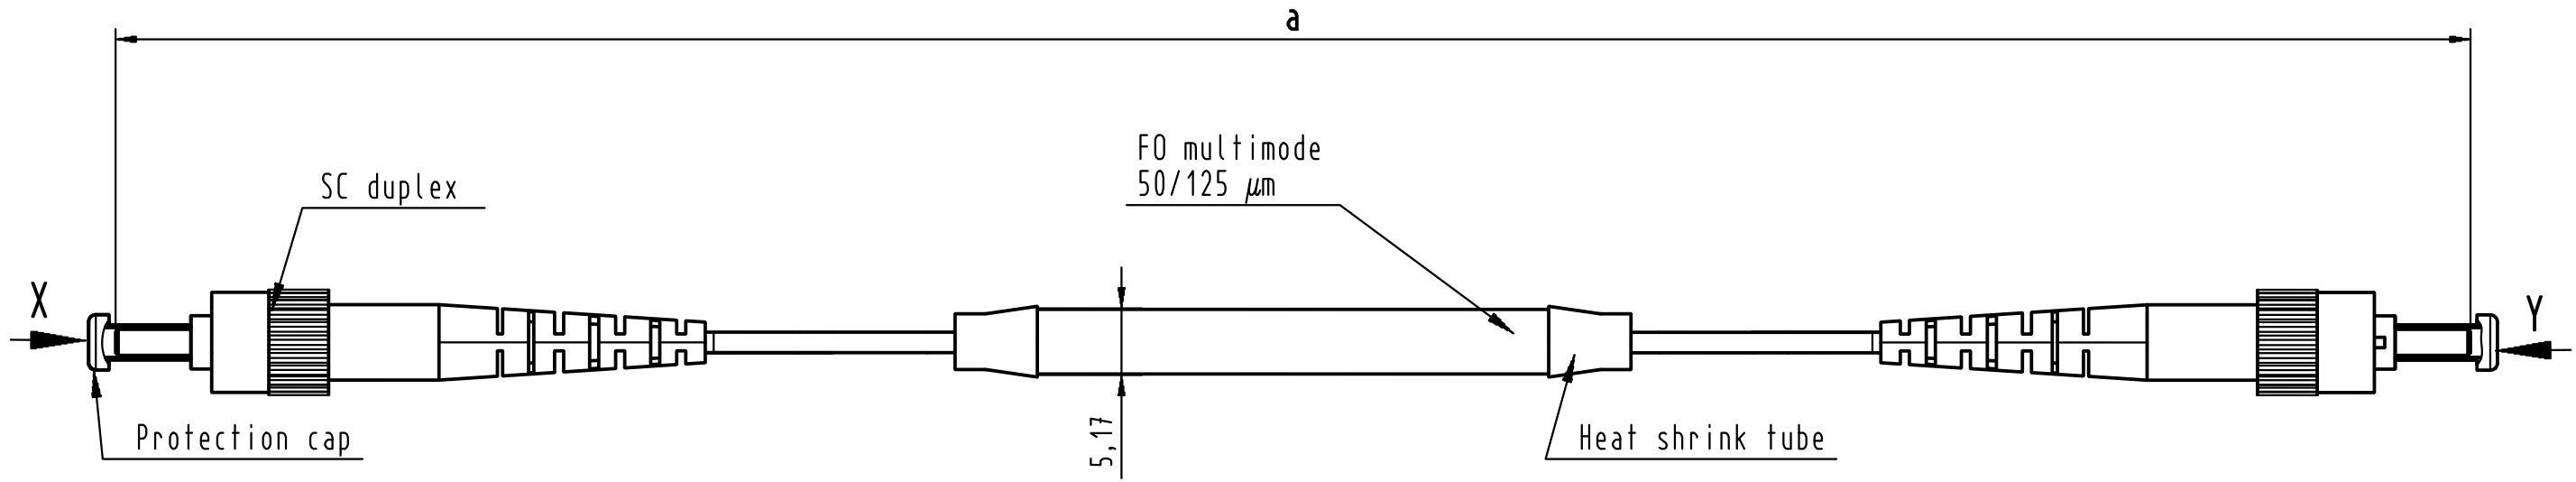



X  
(without protection cap)



Loading-Plan



Y  
(without protection cap)

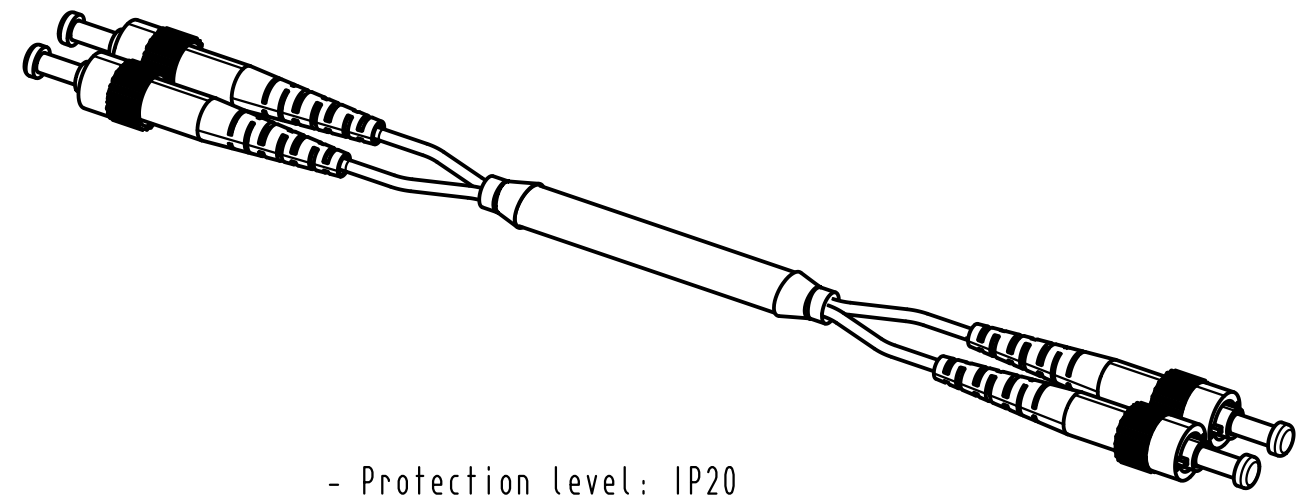


- Protection level: IP20  
- Temperature range: -10°C ... +70°C

For Information Only  
-won't be replaced when changed-

10	33 01 241 010 0007	FO multimode, 50/125 μm	10000 ± 100
9	33 01 241 009 0007	FO multimode, 50/125 μm	9000 ± 90
8	33 01 241 008 0007	FO multimode, 50/125 μm	8000 ± 80
7	33 01 241 007 0007	FO multimode, 50/125 μm	7000 ± 70
6	33 01 241 006 0007	FO multimode, 50/125 μm	6000 ± 60
5	33 01 241 005 0007	FO multimode, 50/125 μm	5000 ± 50
4	33 01 241 004 0007	FO multimode, 50/125 μm	4000 ± 40
3	33 01 241 003 0007	FO multimode, 50/125 μm	3000 ± 30
2	33 01 241 002 0007	FO multimode, 50/125 μm	2000 ± 20
1	33 01 241 001 0007	FO multimode, 50/125 μm	1000 ± 15

Cont. No.	Part-No.	Type of cable	Dim. a[mm]
-----------	----------	---------------	------------

All Dimensions in mm Original Size DIN A 3		Techn. Character.			Nicht tolerierte Maß/Free size tolerances	
			Dat.	Name	Maßstab/Scale	FO jumper cable 2xST duplex Multi Mode 50/125 μm
		Detail.	20.09.10	MS		
		Insp.	20.09.10	RA		
		Stand.				
DRS815A		HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP				TB 33 01 241 xxx 0007
Mod.	Dat.	Name		Sub.		Blatt/page