


DWG. NO.
29JP158

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU CONNECTION TECHNOLOGY. IT IS SUBJECT TO CHANGE AND THE CONTROLLING DOCUMENT CONTROL CENTER SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS INFORMATION IS CONFIDENTIAL AND DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THEN SOURIAU PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM SOURIAU CONNECTION TECHNOLOGY, YORK, PA.

MATERIAL & FINISH		ELECTRICAL CHARACTERISTICS	
MATERIAL:	BODY: STAINLESS STEEL PER ASTM B 582 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B 196 DUTER CONTACT: BERYLLIUM COPPER PER ASTM B 196 INSULATOR: PTFE FLUOROCARBON PER ASTM-1710	IMPEDANCE:	50 OHMS
FINISH:	BODY: PASSIVATED PER SAE AMS-QQ-P-35 CENTER CONTACT: GOLD PER ASTM B 488, 100 UIN MIN. DUTER CONTACT: NICKEL (IP23) PER QQ-N-290, 200 UIN MIN.	FREQUENCY RANGE:	DC TO 4 GHZ
		DIELECTRIC WITHSTANDING:	1500 VRMS
		INSULATION RESISTANCE:	5000 MEGOHMS
		WORKING VOLTAGE:	500 VRMS
		INTERFACE PER MIL-PRF-39012	

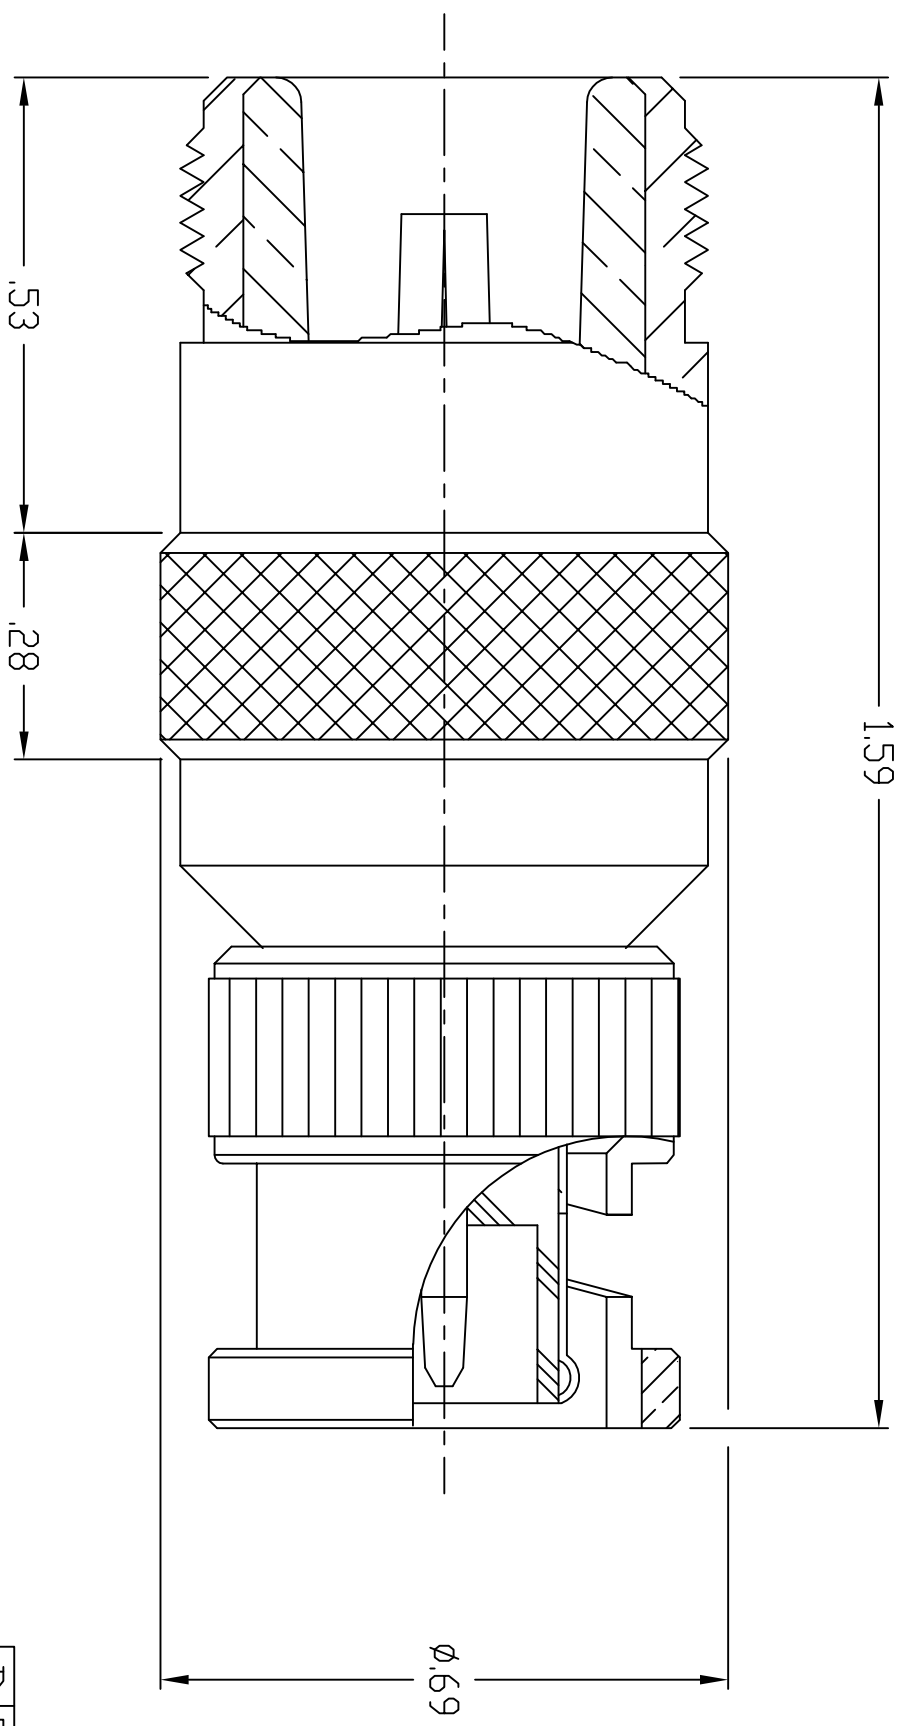

LINEAR MEASURE:	(INCH)	(mm)
THIRD ANGLE PROJECTION		
TOLERANCES UNLESS OTHERWISE SPECIFIED		
No. OF PLACES	INCH [mm]	
ONE PLACE	±.1 [±.3]	
TWO PLACES	±0.02 [±.5]	
THREE PLACES	±0.010 [±.25]	
ANGLES 1°		

DRAWING TITLE
"N" JACK TO BNC PLUG ADAPTER
CAT. NO. 29JP158-1

REV	DESCRIPTION	DATE	BY	CHKD	DATE
B	REDRAWN ON SOURIAU FORMAT	8-5-05	DS	RL	8-5-05

CAGE NO: 09922
SIZE: B

CUSTOMER

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994

APPROVAL

DRAWN:	DS	8-5-05
CHKD:	RL	8-5-05
DSSN:	RL	8-5-05
MFG:		
QC:		

DRAWING SCALE: N/A

DRAWING NO. 29JP158

REV B



2

1

2

1

A

B