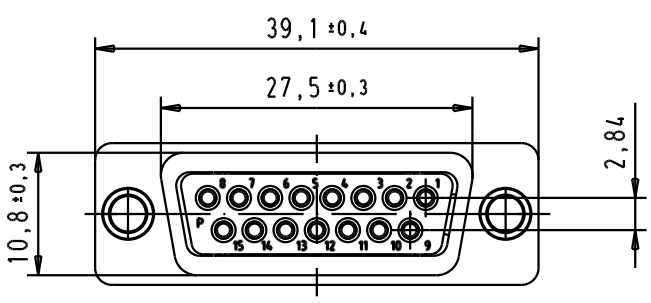
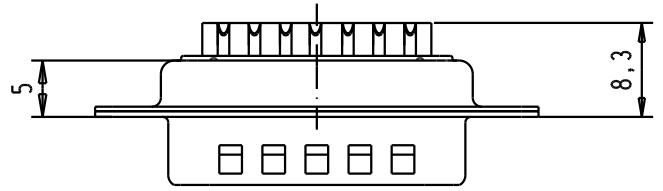


Solder buckets for AWG 20 Max





SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pf ± 20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

B

A

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4
			Detail.	8-JUL-02	CV	
			Insp.			
			Stand.			
33267	17/11/05	JMDR	HARTING EURL F-95972 Paris			
31058	8-JUL-02	CV	Mod.	Dat.	Name	

D-Sub, male, straight
15 Poles, solder buckets,
tin plated shell with
dimples and holes

TB 09642217220

Ma?Ms lab/
Scale
1.5:1
Blatt/ Page
1 / 1