
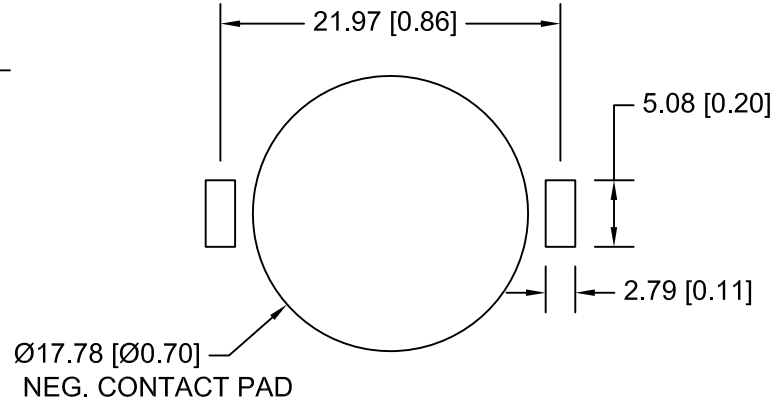



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

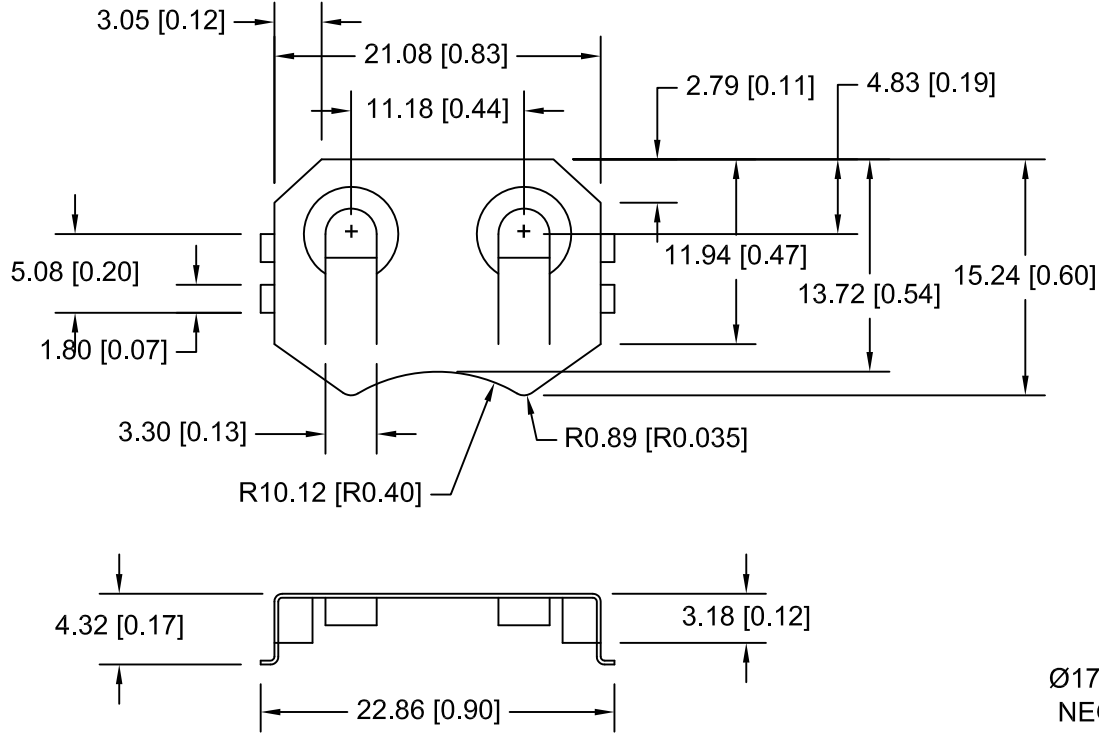

PCB LAYOUT

**NOTES:**

- 1. MATERIAL:  
0.25mm PHOSPHOR BRONZE, GOLD FLASH OVERALL, 1u-3u.  
ROHS 2 COMPLIANT
- TEMPERATURE RANGE: -40°C TO +270°C
- \* VIBRATION TEST: 10-50-10 HZ SWEEPED IN 60 SECONDS  
X,Y,Z DIRECTION: 1 HOUR EACH DIRECTION
- \* RESULT: NO DISLODGEEMENT OF THE CELL OR DAMAGE  
NO DISCONTINUITY OVER 10 MICRO-SECONDS
- \* SHOCK TEST: HALF SINE WAVE ACCELERATION 150G.  
6 MILLISECONDS  
3 SHOCK PULSES EACH DIRECTION PER  
AXIS, TOTAL OF 18 PULSES
- \* RESULT: NO EVIDENCE OF PHYSICAL DAMAGE

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.1 (.004)	Title CR2032 BATTERY RETAINER		
Fractional ± .2 (.008)		Date 02/21/14	Drawing Number BK-912-G
Angular ± 1°			