



- Protection level: IP20
 - Temperature range: -10°C ...+70°C


D	15	33012410600005	FO multimode cable, 50/125µm	60
	14	33012410500005		50
	13	33012410300005		30
	12	33012410200005		20
	11	33012410150005		15
	10	33012410100005		10
	9	33012410090005		9
E	8	33012410080005		8
	7	33012410070005		7
	6	33012410060005		6
	5	33012410050005		5
	4	33012410040005		4
	3	33012410030005		3
	2	33012410020005		2
F	1	33012410010005		1
	Cont. no.	Part. no.	Type of cable	Dim. a[m]

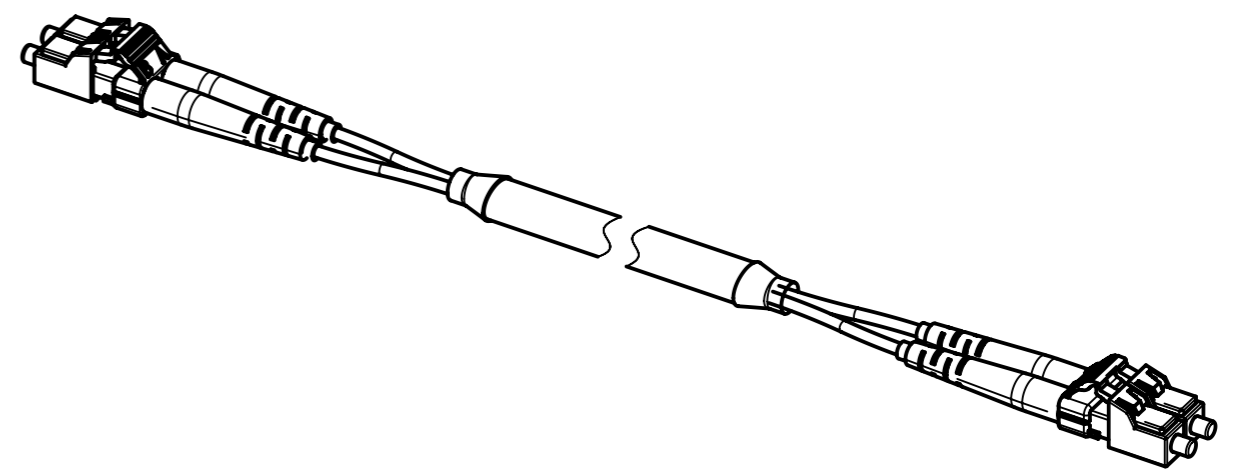

X (2:1)
 (without protection cap)



Y (2:1)
 (without protection cap)



Loading-Plan
 A — red — B
 B — green — A

	All rights reserved		Scale 1.5:1		Free size tol.		Ref.	
	Department EC PD - RO		Created by TOMUTA	Inspected by AVRAM	Standardisation HOFFMANN	Date 2014-05-26	State Final Release	
HARTING Electronics GmbH D-32339 Espelkamp		Title LC Cable Assembly			Type TB		Number 3301241XXX0005	
						Doc-Key / ECM-Nr. 100210841/UGD/008/D 50000075248		
						Rev. D		
						Page 1/1		