


PART NO.	MAX. BUNDLE DIA.	"L" LENGH APPROX	"W" WIDTH REF	"T" THICKNESS REF	"A"	"B" REF	"C" REF	HOLE DIA.	PANEL THICKNESS	MIN. LOOP TENSILE
WIT-50RLA-M	2.00 (50.8)	8.87 (225.4)	.19 (4.8)	.05 (1.3)	.20 (5.1)	.32 (8.1)	.21 (5.4)	.187±.003 [4.8±0.08]	.093 [2.36]	50 LBS
WIT-50RLA-1	1.00 (25.4)	5.32 (135.0)			.26 (6.5)					
WIT-50RLA-2	1.50 (38.1)	6.69 (170.0)			.24 (6.0)					
WIT-50RLA-3	1.75 (44.5)	7.87 (200.0)								

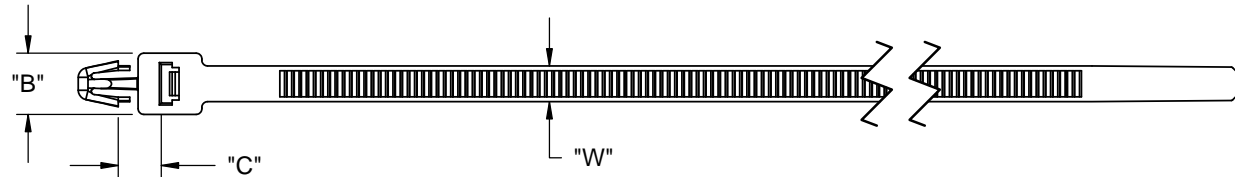

NOTES:

1. MATERIAL: NYLON 6/6 (RMS-01).
2. COLOR: NATURAL.
3. UV STABILIZED NYLON 6/6 (RMS-46), COLOR BLACK. AVAILABLE BY SPECIAL ORDER ONLY. TO ORDER ADD "-UVB" TO PART NUMBER.
4. THE SUFFIX "-M" IS FOR PACKAGING OF 1000 PCS

REV.			TITLE:			DWG IN IN [MM]		PRINT TYPE		
F	SEE CO 200661 FOR CHANGES	SK 05/12/11	SELF-MOUNT TIES <small>CREATED USING SOLIDWORKS</small> TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC.=±1/64 ANG.=±1°			FILE #: WIT-50RLA	DWN: SK	APP: SK	FINAL PART # SEE TABLE	CA
E	SEE CO 200430 FOR CHANGES	SK 09/08/09				SHEET: 1 OF 1	SHEET SIZE: A	DT: 05/06/05		
D	SEE ECN #1241 FOR CHANGES	SK 10/31/06								
C	ADDED -1,-2,-3 SIZES, SEE ECN #1016	SK 06/06/05								
-	SEE ENGINEERING FOR REVISION A-B	-- ----								
REV.	DESCRIPTION	ENGR. DATE								