




REV	ECN	APP'D
-	4679	JT 12/20/01
A	5793	

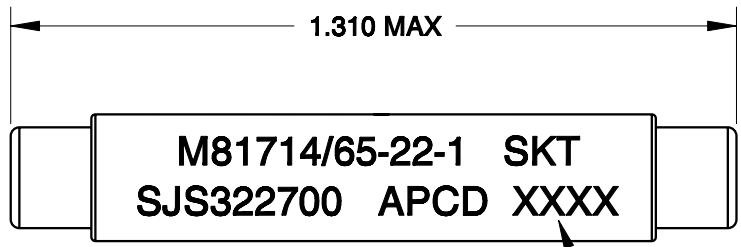

DATE CODE

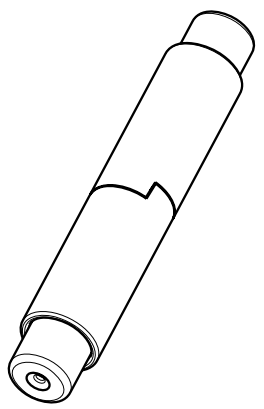

SCALE 2:1

NOTES:

1. MATERIALS:
 INSULATOR BODY: POLYETHERIMIDE PER ASTM-D-5205
 WIRE-SEALING GROMMET: SILICONE RUBBER PER A-A-59588
 INTERNAL CONTACT: COPPER ALLOY, GOLD FINISH
2. PART ACCEPTS M39029/22-191 SOCKET CONTACTS - PER TABLE.
3. OPERATING RANGE:
 TEMPERATURE: -65° C TO 200° C
 INSULATION RESISTANCE: 5000 MEGOHMS MIN
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, SEA LEVEL
 200 VRMS, 100,000 FT ALTITUDE
 CURRENT RATING: 5 AMPS
 VIBRATION AND SHOCK: PER MIL-T-81714, PARA. 3.5.5 AND 3.5.8.

PART NO.	DESCRIPTION	P/N MARKING
SJS322600	CONTACTS NOT SUPPLIED	SJS322700
SJS322700	QTY 2, M39029/22-191 INCLUDED	

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	PROJECTION 	<h1>Amphenol Pcd</h1> <p>SPECIFICATION DRAWING</p>	
			ENGR	
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA			S. HORNER	12/17/01
			CHKD	
			APPD	

TITLE		SJS WIRE SPLICE SINGLE, SIZE 22	
SIZE	DWG NO.		REV
A	SJS322700		A
CODE: 58982	SCALE: 3:1	SHEET 1	OF 1