


Leaded Ferrite Bead Inductors (FB series A type)

FBA04HA600BB-00

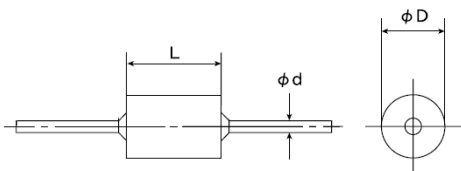

■ Features

- Item Summary
60Ω, 7 A, φ 3.5x6.0mm Axial
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 1000pcs

■ Products characteristics table

| | |
|-------------------------------|--|
| Impedance [100MHz] | 60 Ω min |
| Case Size (mm) | 3.5x6.0 |
| Rated Current (max) | 7 A |
| DC Resistance (max) | 10 mΩ |
| Z Measuring Frequency | 50 MHz |
| Operating Temp. Range | -25 to +85 °C (Including-self-generated heat) |
| Insulation Resistance (min) | 1 MΩ |
| RoHS2 Compliance (10 subst.) | Yes |
| REACH Compliance (173 subst.) | Yes |
| Soldering | Wave |

■ External Dimensions

| | |
|-------------|------------------|
| Dimension D | φ 3.5 ±0.2 mm |
| Dimension L | 6.0 +0.5/-0.0 mm |
| Dimension d | φ 0.65 ±0.05 mm |

2017.04.30

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.