



MSTBV 2,5 HC/10-GF-5,08 BK - 1704471

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 16 A, Number of positions: 10, Pitch: 5.08 mm, Color: black, Contact surface: Tin, Mounting: Wave soldering

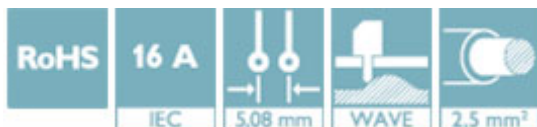

Key Commercial Data

Packing unit	50 STK
GTIN	 4 046356 721547
GTIN	4046356721547

Technical data

Dimensions

Pitch	5.08 mm
Dimension a	45.72 mm
Constructional height	12 mm
Length of the solder pin	3.9 mm

General

Range of articles	MSTBV 2,5 HC/...-GF
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	16 A
Color	black
Number of positions	10

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Approvals

Approvals

MSTBV 2,5 HC/10-GF-5,08 BK - 1704471

Approvals

Approvals

VDE Gutachten mit Fertigungsüberwachung / IECCEB Scheme / cULus Recognized / EAC

Ex Approvals

Approval details

VDE Gutachten mit Fertigungsüberwachung		http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx	40004701
---	--	---	----------

IECEE CB Scheme		http://www.iecee.org/	DE1-56062-B1B2
-----------------	--	---	----------------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-19931011
	B	D	
Nominal current I _N	16 A	10 A	
Nominal voltage U _N	300 V	300 V	

EAC		B.01742
-----	--	---------

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>