
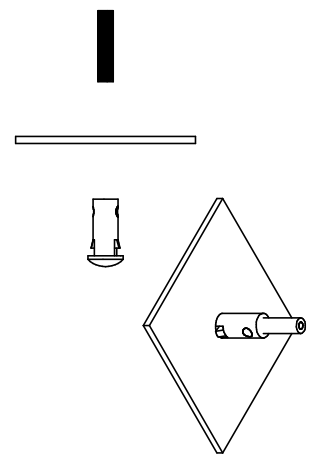



© COPYRIGHT 2010 BY INDUSTRIAL FIBER OPTICS, INC.  
ALL RIGHTS RESERVED.

**LIGHT PIPE PREPARATION/INSTALLATION:**



- NOTES:**
1. ROHS COMPLIANT
  2. UL 94V-2 FLAMMABILITY RATING
  3. -40°C TO 85°C OPERATING TEMPERATURE
  4. SUITABLE FOR LIGHT PIPE WITH  $\varnothing 2.2\text{mm}$  JACKET AND OPTICAL CORE NO GREATER THAN  $\varnothing 1.5\text{mm}$


REVISIONS				
REV	DESCRIPTION	ECO	DATE	APVD
A	Initial release		11/12/2008	RD
B	Redrew, fixed diameter of mounting hole	0065	2/9/2010	AR

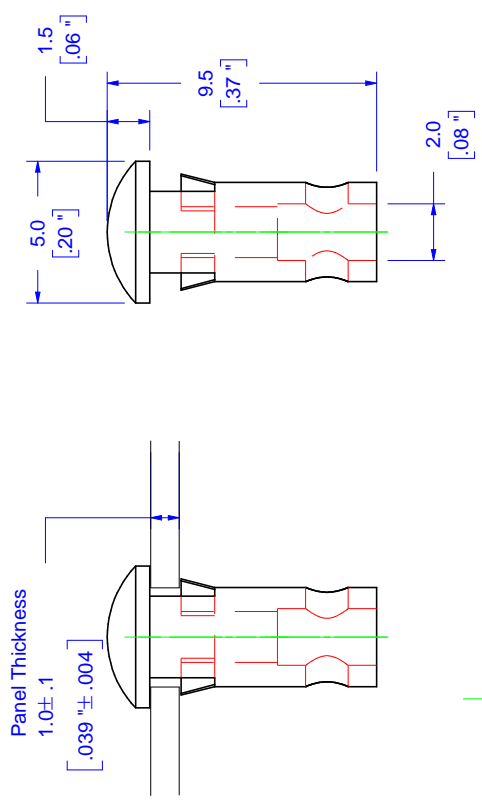

**MOUNTING HOLE**

PART IS MADE OF TRANSPARENT POLYCARBONATE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	Light Pipe
	MATERIAL	Polycarbonate
TOLERANCES	FINISH	NAME
0 PLC: $\pm 1$	SURFACE 3.2	INDUSTRIAL FIBER OPTICS TEMPE, AZ 85281
1 PLC: $\pm .25$	TEXTURE: $\checkmark$	
2 PLC: $\pm .127$	DRAWN BY B. Bidwell	
3 PLC: $\pm .025$	DATE 2/9/2010	
4 PLC: $\pm .013$	CHECKED BY A. Reyes	SIZE SCALE
ANGLE: $\pm 1/2^\circ$	DATE 2/11/2010	A 4:1
REMOVE BURRS AND SHARP EDGES FLATNESS .005mm PER mm ALL DIMENSIONS AFTER FINISH		PART NUMBER
		51 0360
		REV
		B



**METRIC**

DO NOT SCALE DRAWING

Sheet 1 of 1