


NOTES:

1.0 SPECIFICATIONS:

- 1.1 FREQ: RANGE: 0.1 TO 12.4 GHz
- 1.2 MAXIMUM INSERTION LOSS: 0.45dB
- 1.3 IMPEDANCE 50 OHMS
- 1.4 MAXIMUM VSWR:
 - 0.1 - 8.0GHz 1.20:1
 - 8.0 - 12.4GHz 1.25:1
- 1.5 DC WORKING VOLTAGE: 200 VOLTS
- 1.6 OPERATING TEMP. RANGE:
 - 20°C TO +100°C
- 1.7 INSERTION LOSS @ 1 KHz: > 65dB

2.0 MARKING:

- 2.1 MARK UNIT AS SHOWN
(REF: INK-02597-27-01)
- 2.2 COVER MARKING WITH CLEAR TAPE

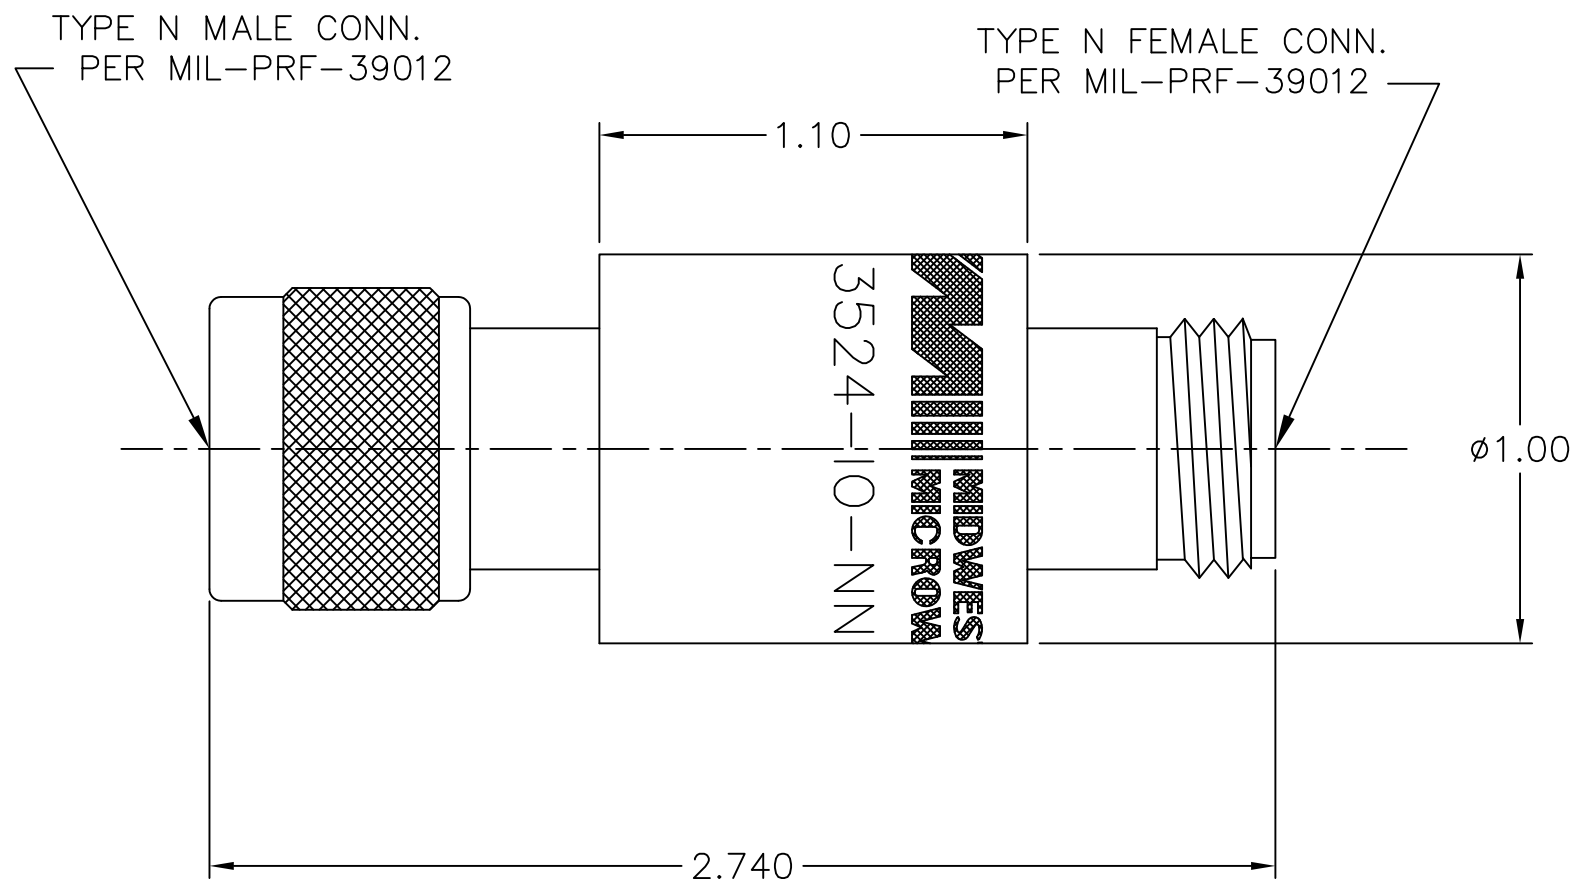

DWG. # WAS: 02358-01-00

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	CAGE CODE 34078	MIDWEST MICROWAVE	
	EMERSON Network Power Connectivity Solutions		TITLE DC BLOCK OUTLINE DRAWING
DRAWN/DATE C.RICKARD 8/26/91	ENG./DATE G.KOZAK 9/5/91	DRAWING NUMBER DCB-3524-10-NNN-02-01	REV. A2
CHECKED/DATE A.BEATTY 9/5/91	APPROVED/DATE	SCALE: 2=1	SHEET 1 of 1

REV.	DESCRIPTION	DATE
-	RELEASED	4/30/79
A	ECR 6545	6/29/89
A1	RE-DRAWN ON CAD	8/26/91
A2	ADDED TITLEBLOCK	5/27/05