


LOC	DIST	P	F	REVISIONS			
ZONE	LTR	DESCRIPTION	DATE	APPD			
AJ	16			0	RLSE -1 PER 96-3329-010	12-5-96	JL

- ① STAINLESS STEEL PER ASTM-A-582.
- ② BERYLLIUM COPPER PER ASTM-B-196.
- ③ PTFE PER MIL-P-19468.
- ④ GOLD PLATE PER MIL-G-45204  
0.76 μm [.000030] MINIMUM THICK.
- ⑤ PASSIVATE PER QQ-P-35

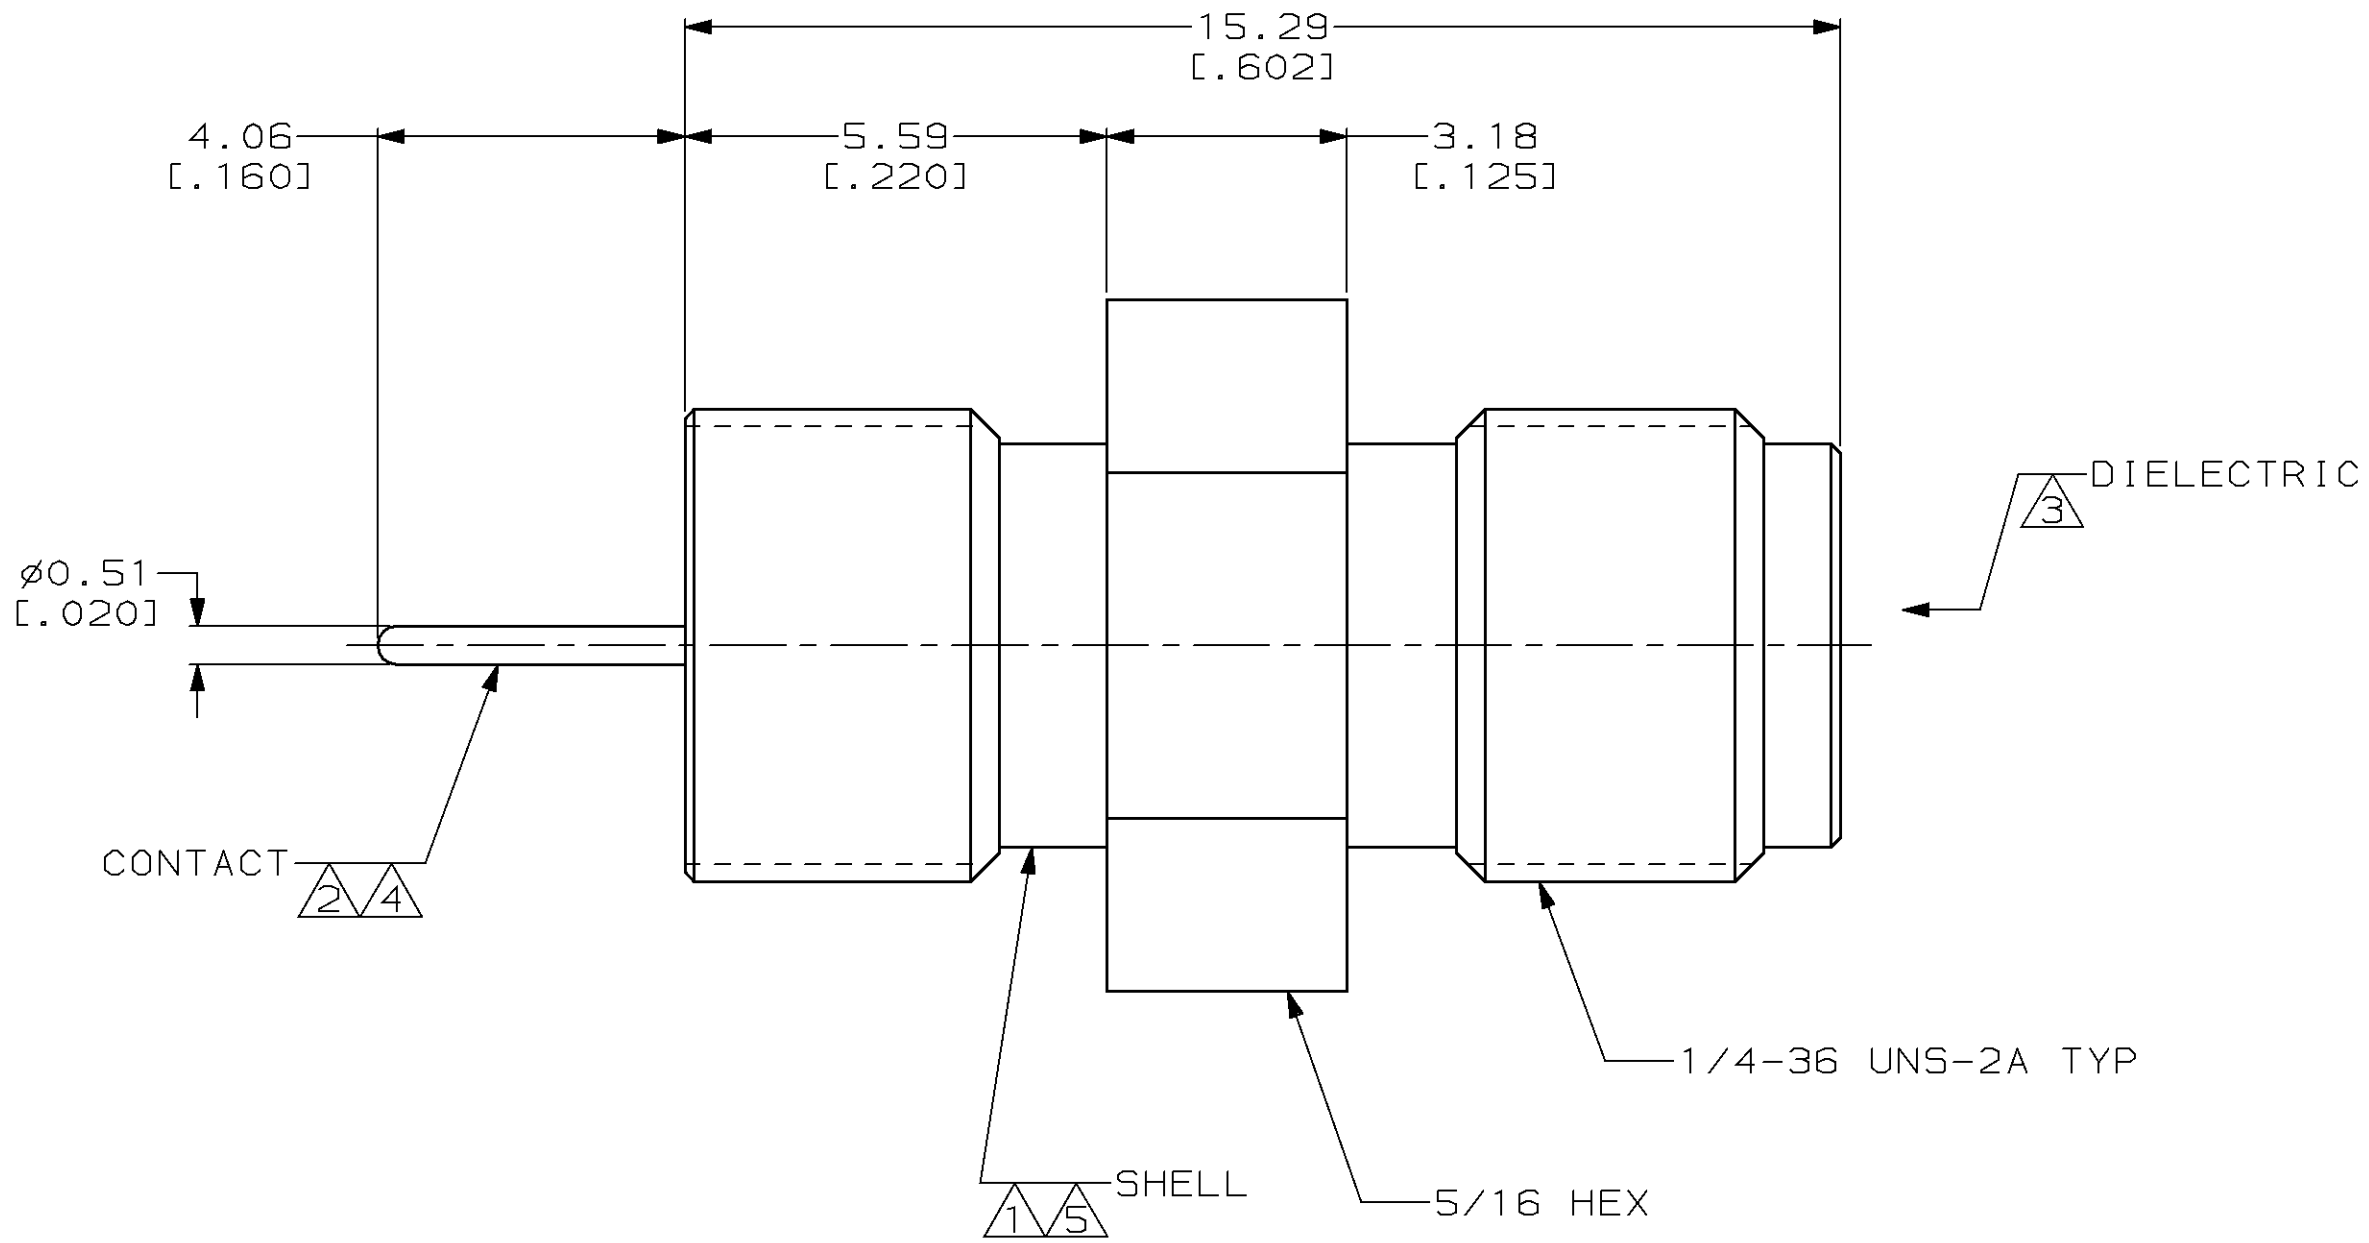

415702-1  
PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± 0.20 [.008] 3 PLC DEC ± - ANGLES ± -	DR 12-5-96 J. LIPPERT	AMP Incorporated Harrisburg, PA 17105-3608
	CHK 12-5-96 J. CABARLO	
MATERIAL SEE NOTES 1 THRU 3	APPD 12-5-96 J. CABARLO	NAME JACK, PCB, VERT, SMA
FINISH SEE NOTES 4 & 5	APPD 12-5-96 J. LIPPERT	SIZE C
	PRODUCT SPEC -	CAGE CODE 00779
	APPLICATION SPEC -	DRAWING NO G=415702
	WEIGHT -	SCALE 10:1
		SHEET 1 OF 1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.