

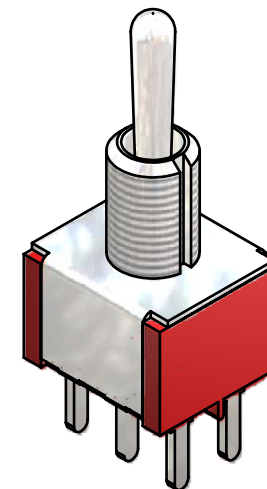



SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

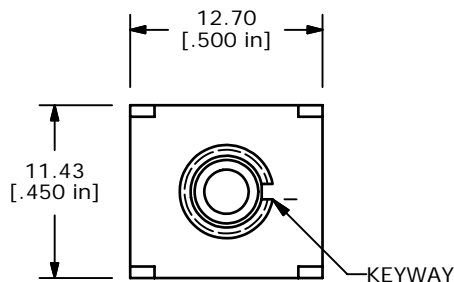

ISOMETRIC



CIRCUI: DPDT

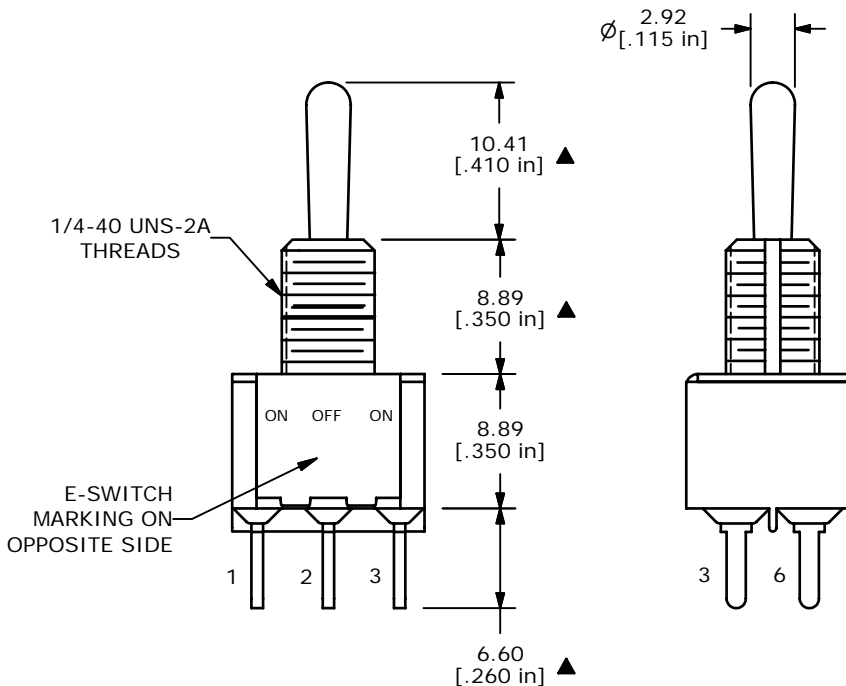

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲4. PLATING MATERIAL: SILVER
5. RATING: 5AMPS W/RESISTIVE LOAD @ 120VAC OR 28VDC
2 AMPS W/ RESISTIVE LOAD @ 250VAC
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT
- ▲12. HARDWARE TO BE SHIPPED BULK
T100011 - LOCK WASHER, QTY-1
T100015 - LOCK RING, QTY-1
T100000 - HEX NUT, QTY-2



B	17326	TERMINAL TO 6.60 INSTEAD OF 6.35	5/24/07	TN
A	17301	RELEASED FOR PRODUCTION	5/17/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 100DP3T1B1M3QEH				
SCALE	DATE	DR	DWG	REV
2:1	5/24/2007	TN	ST123005	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED