

Type 2 surge protection base element - VAL-MS-T1/T2 BE/O - 2905650

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Base element for type 1/2 arresters from the VALVETRAB MS T1/T2 product range. Version: 1-channel

Why buy this product

- Plug-in direction parallel to the conductor axis
- Versions with and without floating remote indication contact
- Rack-mount 2U panel applications
- Accepts Type 1 and Type 2 VAL-MS plugs.
- Coding when protective plug is inserted for the first time
- DIN rail mounting



Key Commercial Data

Packing unit	12 STK
Minimum order quantity	12 STK
GTIN	 4 046356 983006
GTIN	4046356983006

Technical data

Dimensions

Height	77.1 mm
Width	17.6 mm
Depth	89.2 mm

Ambient conditions

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Altitude	max. 2000 m
Permissible humidity (operation)	5 % ... 95 %

Type 2 surge protection base element - VAL-MS-T1/T2 BE/O - 2905650

Technical data

Ambient conditions

Shock (operation)	25g
Vibration (operation)	5g

General

IEC test classification	I / II
	T1 / T2
EN type	T1 / T2
Mounting type	DIN rail: 35 mm
Color	black
Housing material	PBT
Degree of pollution	2
Flammability rating according to UL 94	V0
Type	Base element, DIN rail mounting
Number of positions	1
Surge protection fault message	none

Additional descriptions

Note	For installation into a touch protected cabinet. For applications with $U_c > 500$ V distances at the side and distances at the connection area must be minimum of 5 mm between different active parts including earthed parts.
------	---

Protective circuit

Nominal frequency f_N	50 Hz (60 Hz)
Maximum continuous voltage U_c	600 V AC
Rated load current I_L	80 A (with serial 16mm ² through wiring)
	80 A (with serial 16mm ² through wiring)
Short-circuit current rating I_{SCCR}	25 kA
Max. backup fuse with V-type through wiring	80 A AC (gL/gG)
Max. backup fuse with branch wiring	160 A (gL/gG)

Connection data

Connection method	Biconnect terminal blocks
Screw thread	M5
Tightening torque	4.5 Nm
	30 lb _F -in. (UL)
Stripping length	16 mm
Conductor cross section flexible min.	1.5 mm ²
Conductor cross section flexible max.	25 mm ²
Conductor cross section solid min.	1.5 mm ²
Conductor cross section solid max.	35 mm ²
Conductor cross section AWG	15 ... 2 (IEC)
	10 ... 2 (UL)

Type 2 surge protection base element - VAL-MS-T1/T2 BE/O - 2905650

Technical data

UL specifications

SPD Type	4 (for Type 2 applications)
----------	-----------------------------

Standards and Regulations


Standards/regulations	IEC 61643-1 2005
	EN 61643-11/A11 2007

Environmental Product Compliance


China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

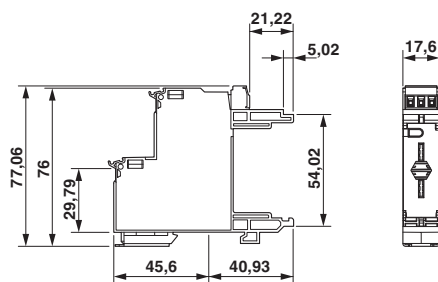

Circuit diagram



FM version shown

FM version shown

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 330181
---------------	--	---	---------------

Type 2 surge protection base element - VAL-MS-T1/T2 BE/O - 2905650

Approvals

cUL Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 330181

cULus Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>