


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

| | | | | |
|-----------------------|--------------------------|--|---------------|---|
| Rating | 6A 125V AC 3A 250V AC | | Mounting Hole | Circuit Diagram |
| Contact Resistance | 50m ohm max. | | | <p>SPDT ON - (ON) () = Momentary</p> |
| Insulation Resistance | DC 500V 100M ohm min. | | | |
| Dielectric Strength | AC 1000V 1 minute | | | |
| Operating Temperature | -20°C ~ 65°C | | | |

Cut-Out 4mm thk. max.

BASE COLOR: Blue
BUTTON COLOR: Black

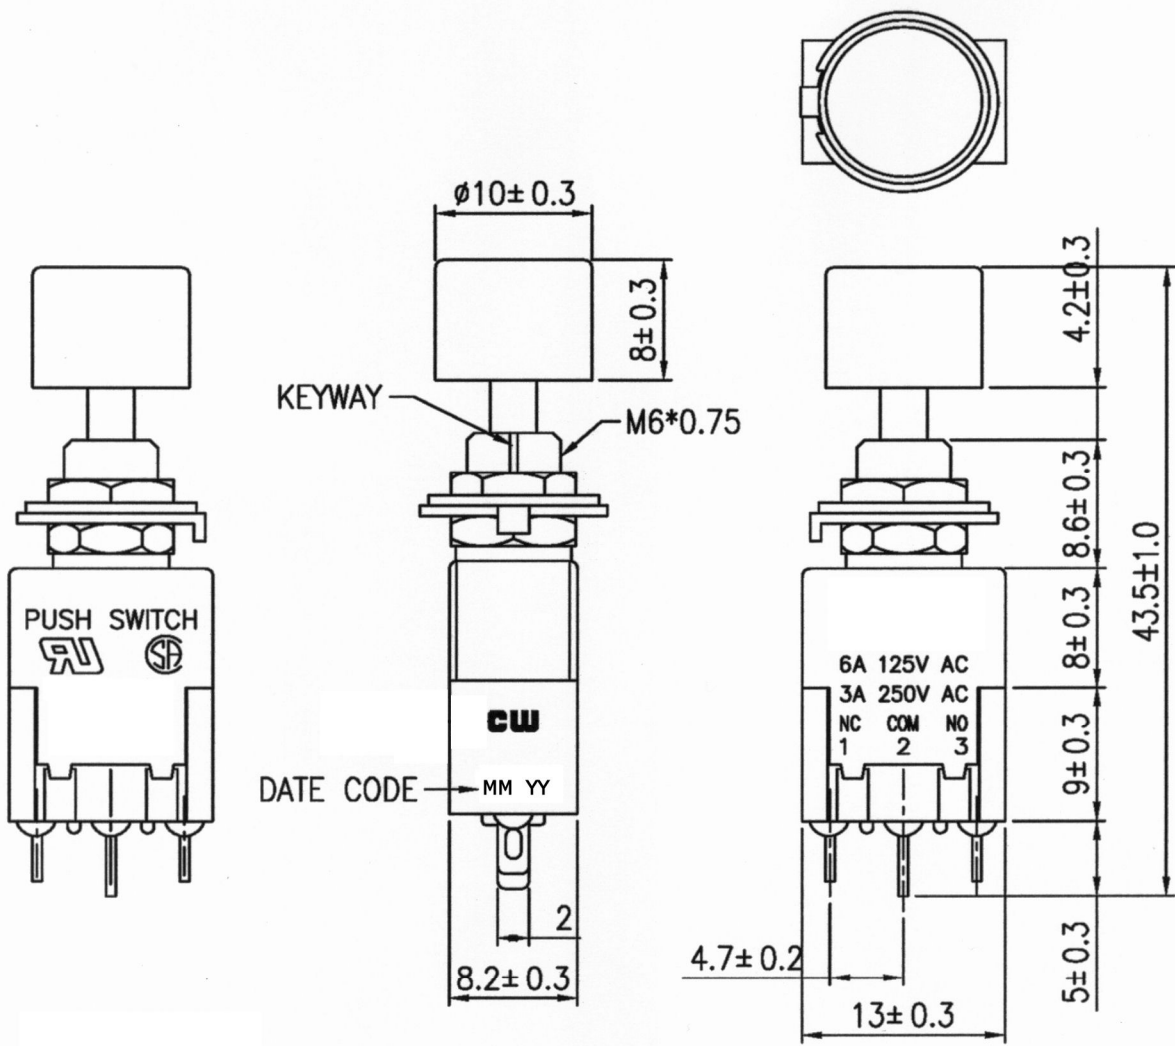

RoHS Compliant

| | | | | |
|---|--------------------------------|--------|-------------------------------|---------------------|
| <p>CW INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com</p> | Date Drawn: 12/22/09 | Rev. 0 | Unit: mm | Checked By: G. Guld |
| | Title: MINI PUSH BUTTON | | CW P/N: GPB001PA06A1UB | |