


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.


REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	Updated Specifications	01-25-11	LY

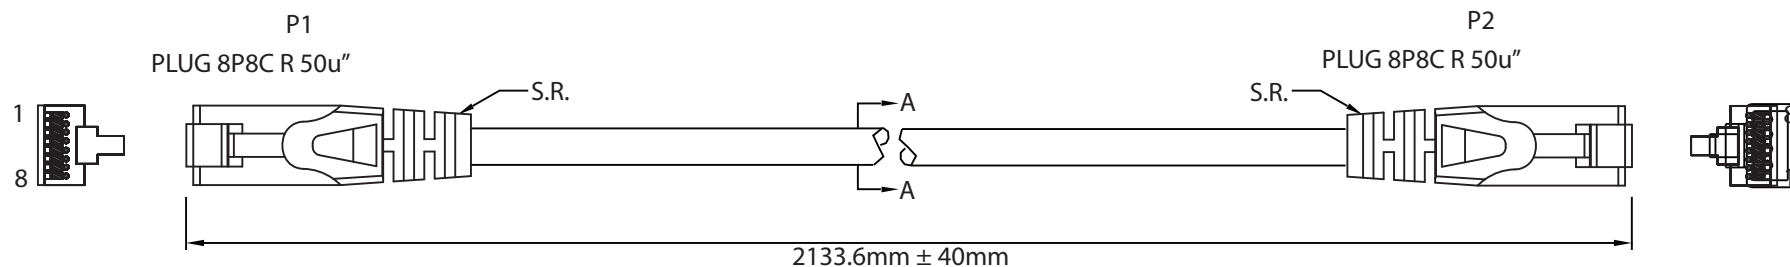

WIRING:568B

P1	COLOR	P2
1	white/orange	1
2	orange	2
3	white/green	3
6	green	6
4	blue	4
5	white/blue	5
7	white/brown	7
8	brown	8

NOTE: ∞ TWISTED PAIR

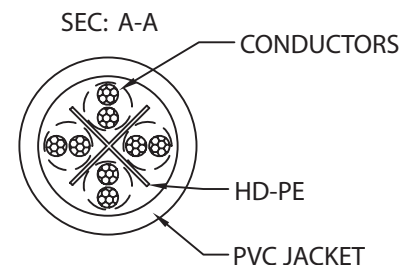

**CONTROLLED**

NOTES:

- CABLE: CAT.6 UTP  
26AWG COPPER STRANDED WIRE. 4 TWISTED PAIRS, 30V, 60°C  
OUTER JACKET: COLOR: GRAY, O.D.: 6.0 ± 0.2mm  
JACKET MATERIAL: PVC
- PLUG TYPE: MODULAR U.S. 8P8C GOLD PLATING 50u"  
MATERIAL: PC UL 94V-2  
S.R.: PVC 75P MOLD, COLOR: GRAY
- PACKING: 1PC/POLYBAG
- RoHS COMPLIANT

Dim range (mm)		Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
0-1		0.15	Part Number: 1226010-07 <span style="border: 1px solid green; padding: 2px;">RoHS Compliant</span>		
1-6		0.20	Description: CAT.6 UTP 8P8C - 8P8C		
6-18		0.30	UNIT: mm		REV.B
18-50		0.50	Checked / Date		Approved / Date
50-120		0.70	Drawn / Date	09-16-10	LY / 09-16-10
120-250		0.90	R.Nuti 09-16-10		
250-500		1.20			