


| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A | 59.6 |
| B | 24.05 |
| C | 4 |
| D | 38.5 |
| E | 43.6 |
| F | 47.8 |
| G | 15.2 |
| H | 70 |
| I | 63.6 |
| K | 60.6 |

| NO. | BESCHREIBUNG / DESCRIPTION |
|-----|---|
| 2 | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3 | DICHTKÖRPER / GROMMET |
| 6 | KONTAKTBUCHSE / CONTACT SOCKET |
| 8 | DOSENGEHÄUSE / SHELL |
| 13 | ENDGEHÄUSE DN / ENDBELL HEATSHRINK |

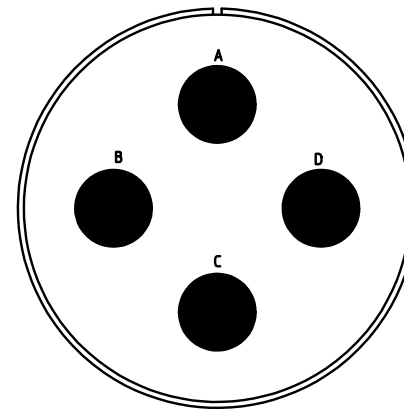

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.
 Specification and Dimensions subject to change
 Drawings illustrate normal insulator positioning

| Material Specification: | |
|-------------------------|---|
| Shell Material: | Aluminium alloy |
| Shell Plating: | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere |
| Contact Material: | Copper alloy |
| Contact Plating: | Hard silver |

all dimensions are in mm
 Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for
 CUSTOMER



description CA3101E36-5S-B-06
 Cable connecting plug
 Endbell for heatshrinkable boots
 Solder Cup / Socket / Layout: 36-5

© All rights reserved. Reproduction or issue to third in any form
 whatever is only permitted with written authorization of ITT Cannon

page 1/1
 revision 1488 30. Jul 18