



view shown without plastic pin and grounding

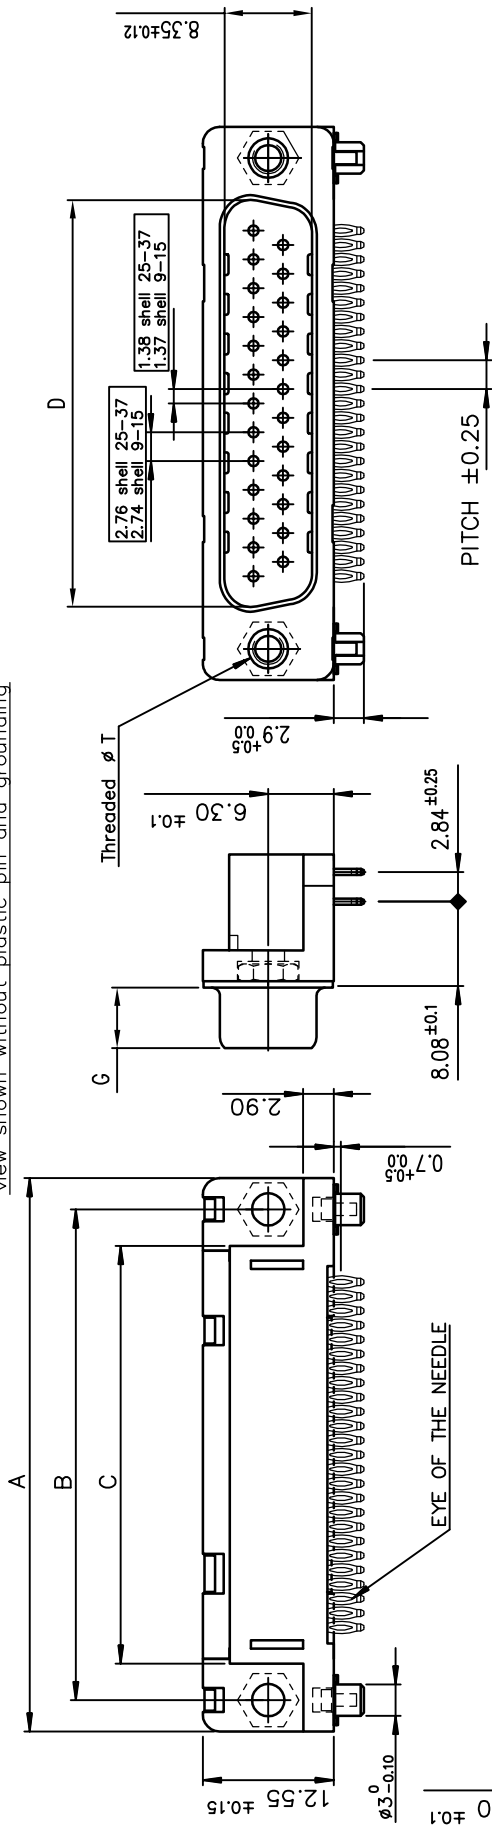

EYE OF THE NEEDLE

PC card drilling dimensions(after plating)
(thickness 1.60 or 2.40±0.20mm)

Detail of grounding strip

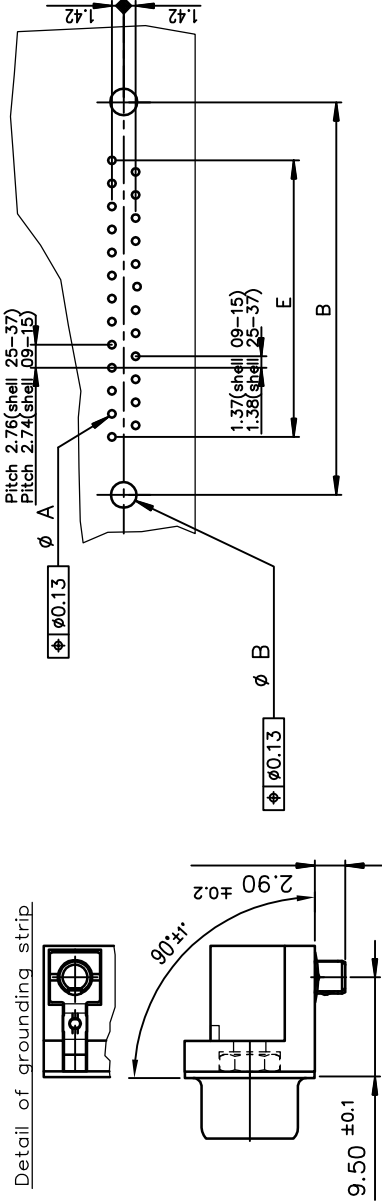

TIN LEAD PART NUMBER

SHELL	A	B	C	D	E	G	PART NUMBER
09	30.81	24.99	18.00	16.79	10.96	5.90	D09P80C4G*00 D09P80C6G*00
15	39.14	33.32	26.32	25.12	19.18	5.90	D15P80C4G*00 D15P80C6G*00
25	53.03	47.04	40.04	38.84	33.12	5.70	D25P80C4G*00 D25P80C6G*00
37	69.32	63.50	56.50	55.30	49.68	5.70	D37P80C4G*00 D37P80C6G*00

Gold flash 0.76 >> gold

Threaded ØT M3 = L
Threaded ØT 4.40 = X

LEAD FREE PART NUMBER

SHELL	A	B	C	D	E	G	PART NUMBER
09	30.81	24.99	18.00	16.79	10.96	5.90	D09P80C4G*00LF D09P80C6G*00LF
15	39.14	33.32	26.32	25.12	19.18	5.90	D15P80C4G*00LF D15P80C6G*00LF
25	53.03	47.04	40.04	38.84	33.12	5.70	D25P80C4G*00LF D25P80C6G*00LF
37	69.32	63.50	56.50	55.30	49.68	5.70	D37P80C4G*00LF D37P80C6G*00LF

Gold flash 0.76 >> gold

Threaded ØT M3 = L
Threaded ØT 4.40 = X

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

mat'l. code	ISO 1302	tolerance	ISO 406 ISO 1001	projection	product family	D-SUB
lfr	EX-17859	dr	MP 2014/06/06	angles	linear	MM
date	2014/06/06	dr	PESSON 1995/10/27	scale	2:1	
eng	MITHUN PAUL	chr	ALIJS BABU	dwg no	sheet 1 of 1	size
appd	BIJU K PAUL	type	Product Customer Drawing	C01-8646-0408	A3	
revision	J					
sheet	1					
index						