


ISOMTRIC


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6, 8-9	N/A	2-1, 5-4, 8-7

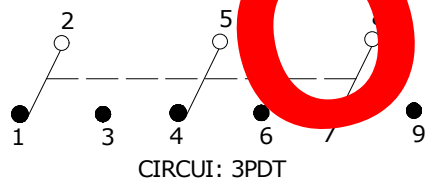

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4 VOLT-AMPS MAX. @ 20V MAX. AC OR DC
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

E-SWITCH  
MARKING OF  
OPPOSITE SIDE

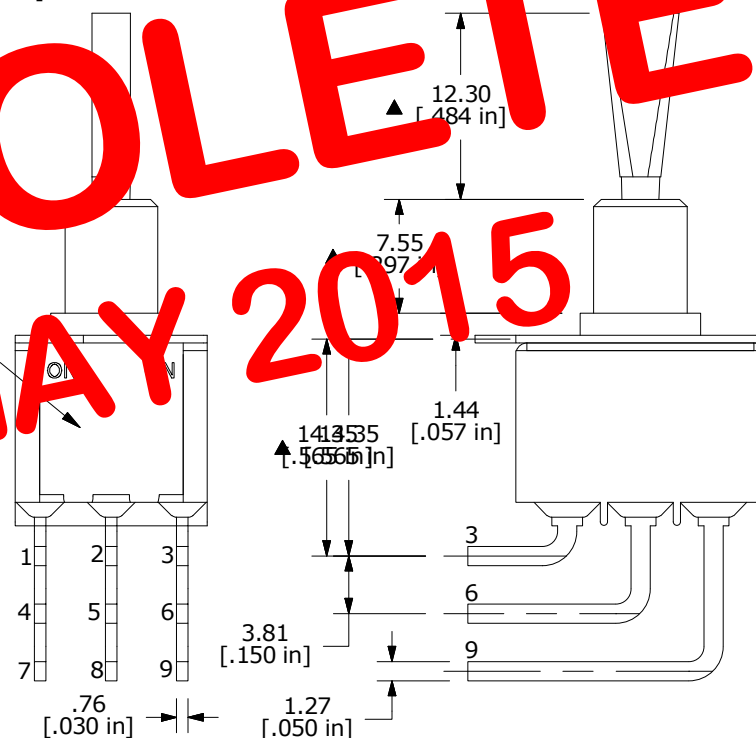

OBSOLETE

MAY 2015



B	15970	UPDATE P.C. MOUNTING LAYOUT	4/18/06	CT
A	15862	RELEASED FOR PRODUCTION	3/15/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 1003P1T6B12M6RE				
SCALE	DATE	DR	DWG	REV
2:1	3/15/2006	PH	T133006	B